



Yuasa Technical Data Sheet

Yuasa YBX1615 - Super Heavy Duty Battery

Performance

| | |
|--------------------------|-------|
| Voltage | 12V |
| Capacity (20-hour) | 135Ah |
| Cold Cranking Amps (EN1) | 910A |

Dimensions

| | |
|--------|-------|
| Length | 514mm |
| Width | 175mm |
| Height | 210mm |



Weights & Measures

| | |
|-----------------------|--------|
| Mean Weight with Acid | 32.5kg |
|-----------------------|--------|

Container Features

| | |
|---------------------------|----------------|
| Case Type | MAC 110 |
| Cell Layout | 3 |
| Hold Down | B3 |
| State of Charge Indicator | ✓ |
| Handles | ✓ |
| Lid Type | SMF Double Lid |

Technology

| | |
|---------------------------|-------------|
| Flame Arrestor Technology | ✓ |
| Recommended Charge Rate | Ca/Ca 8A |
| Performance Marking | W3-C2-V3-E1 |

Terminal Type

T1


Standard DIN Post



Positive Terminal


Negative Terminal

Cell Assembly Layout

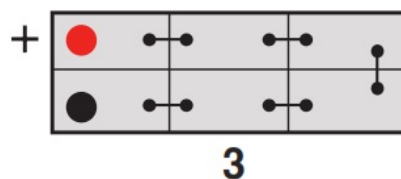

3

Battery Hold-down

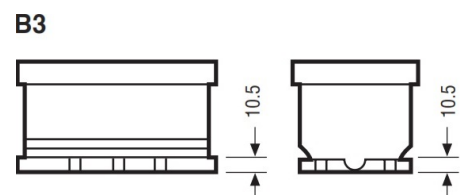

Data Sheet generated on 16/07/2024 - E&OE