



Yuasa Technical Data Sheet

Yuasa YBX1628 - Super Heavy Duty Battery

Performance

| | |
|--------------------------|-------|
| Voltage | 12V |
| Capacity (20-hour) | 143Ah |
| Cold Cranking Amps (EN1) | 900A |

Dimensions

| | |
|--------|-------|
| Length | 513mm |
| Width | 189mm |
| Height | 223mm |



Weights & Measures

| | |
|-----------------------|--------|
| Mean Weight with Acid | 37.6kg |
|-----------------------|--------|

Container Features

| | |
|-------------|-------------|
| Case Type | DIN A |
| Cell Layout | 4 |
| Hold Down | N |
| Handles | ✓ |
| Lid Type | Raised Plug |


Technology

| | |
|-------------------------|-------------|
| Technology | Sb/Ca |
| Recommended Charge Rate | 7A |
| Performance Marking | W2-C2-V2-E1 |

Terminal Type

T1


Standard DIN Post

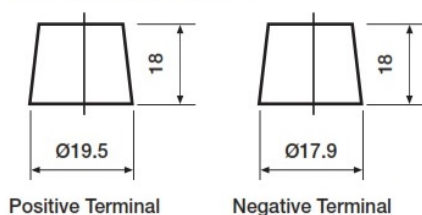

Positive Terminal

Negative Terminal

Cell Assembly Layout

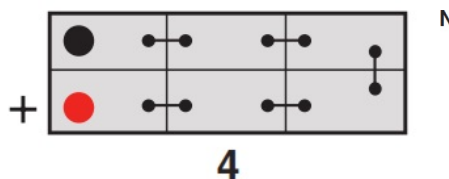

4

Battery Hold-down



N

Data Sheet generated on 17/03/2025 - E&OE