



Yuasa Technical Data Sheet

Yuasa YBX7054 - YBX7000 EFB Start Stop Plus Batteries

Performance

| | |
|--------------------------|------|
| Voltage | 12V |
| Capacity (20-hour) | 40Ah |
| Cold Cranking Amps (EN1) | 340A |

Dimensions

| | |
|--------|-------|
| Length | 197mm |
| Width | 128mm |
| Height | 227mm |

Weights & Measures

| | |
|-----------------------|------------|
| Mean Weight with Acid | 11.5kg |
| Dry Weight | kg |
| Acid Volume | 2.7 litres |



Container Features

| | |
|---------------------------|-------------------|
| Case Type | B20 JIS EFB (M42) |
| Hold Down | N |
| State of Charge Indicator | - |
| Handles | - |
| End Venting | - |
| Semi-Traction Features | - |
| Lid Type | Raised Plug |


Technology

| | |
|-------------------------|-------|
| Flame Arrestor | ✓ |
| Technology | Ca/Ca |
| Separator | PE |
| Recommended Charge Rate | 2A |


Terminal Type

T1/T3


Standard DIN Post

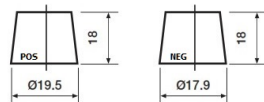

Remove T1 adapter for T3

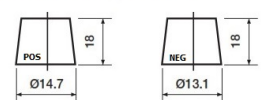

Cell Assembly Layout

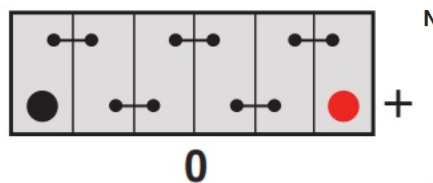

Battery Hold-down



Data Sheet generated on 17/07/2019 - E&OE