



Yuasa Technical Data Sheet

Yuasa YBX9096 - YBX9000 AGM Start Stop Plus Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	70Ah
Cold Cranking Amps (EN1)	760A

Dimensions

Length	278mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	20.5kg
-----------------------	--------



Container Features

Case Type	L3 DIN AGM
Terminal Type	T1
Hold Down	B3
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca VRLA
VDA Roll Over Test	AGM
Recommended Charge Rate	✓
Performance Marking	4A
	W5-C2-V3-M3

Terminal Type

T1


Standard DIN Post

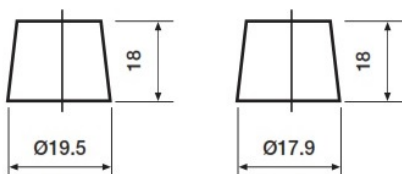


Positive Terminal

Negative Terminal

Cell Assembly Layout

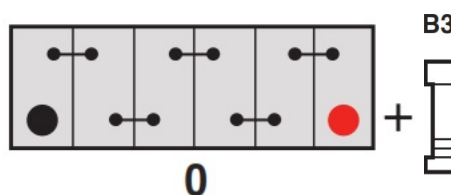

Battery Hold-down

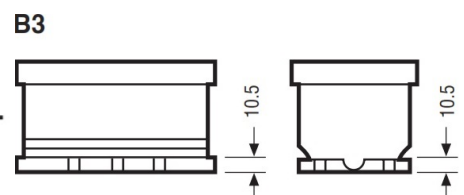

Data Sheet generated on 04/10/2024 - E&OE