



Yuasa Technical Data Sheet

Yuasa YBX3009 - YBX3000 SMF Batteries

Performance

| | |
|--------------------------|------|
| Voltage | 12V |
| Capacity (20-hour) | 30Ah |
| Cold Cranking Amps (EN1) | 300A |

Dimensions

| | |
|--------|-------|
| Length | 167mm |
| Width | 127mm |
| Height | 224mm |

Weights & Measures

| | |
|-----------------------|-------|
| Mean Weight with Acid | 8.6kg |
|-----------------------|-------|



Container Features


| | |
|---------------------------|----------------|
| Case Type | JIS B17 |
| Hold Down | N |
| State of Charge Indicator | ✓ |
| Handles | ✓ |
| End Venting | ✓ |
| Lid Type | SMF Double Lid |

Technology

| | |
|---------------------------|-------------|
| Flame Arrestor Technology | ✓ |
| Separator | Ca/Ca PE |
| VDA Roll Over Test | ✓ |
| Recommended Charge Rate | 2A |
| Performance Marking | W4-C2-V3-E1 |


Terminal Type

T3
Small Japanese
JIS Terminal



Positive Terminal Negative Terminal

Cell Assembly Layout

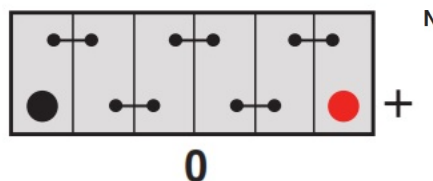

Battery Hold-down



Data Sheet generated on 05/11/2024 - E&OE