



## Yuasa Technical Data Sheet

### Yuasa YBX9020 - YBX9000 AGM Start Stop Plus Batteries

#### Performance

|                          |       |
|--------------------------|-------|
| Voltage                  | 12V   |
| Capacity (20-hour)       | 105Ah |
| Cold Cranking Amps (EN1) | 950A  |

#### Dimensions

|        |       |
|--------|-------|
| Length | 393mm |
| Width  | 175mm |
| Height | 190mm |



#### Weights & Measures

|                       |        |
|-----------------------|--------|
| Mean Weight with Acid | 29.6kg |
|-----------------------|--------|

#### Container Features

|                        |            |
|------------------------|------------|
| Case Type              | L6 DIN AGM |
| Hold Down              | B3         |
| Handles                | ✓          |
| End Venting            | ✓          |
| Semi-Traction Features | ✓          |
| Lid Type               | VRLA       |


#### Technology

|                           |                |
|---------------------------|----------------|
| Flame Arrestor Technology | ✓              |
| Separator                 | Ca/Ca VRLA AGM |
| VDA Roll Over Test        | ✓              |
| Recommended Charge Rate   | 6A             |
| Performance Marking       | W5-C2-V3-M3    |

#### Terminal Type

##### T1


Standard DIN Post

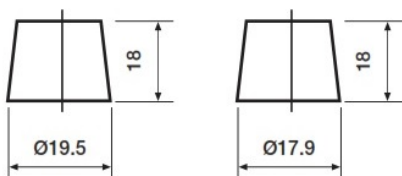


Positive Terminal

Negative Terminal

#### Cell Assembly Layout

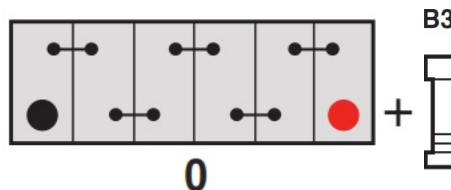

#### Battery Hold-down

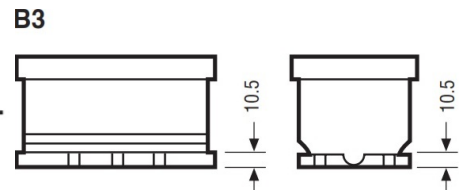

Data Sheet generated on 18/05/2022 - E&OE